

FEATURES

- CA Title 24 Compliant.
- Direct coupled style actuator standard.
- Stainless steel damper side seals.
- **AMCA certified CD-60 Airfoil dampers blades.**
- **Meets leakage rate as required by ASHRAE 90.1.**
- External linkage system.
- Mechanically secured outside air intake filter.
- Capable of introducing up to 100% outdoor air.
- Metal Filter 18-3/8" x 26-3/8" x 7/8" (exact) included

FEATURES (When Ordered With Control Options)

- Fully modulating damper controls with enthalpy, dry bulb and differential temperature sensor options.
- Selectable economizer changeover temperature set point.
- CO2 controller standard.


Wall or duct mounted CO2 sensor provided as option:

- CO2WM - Wall Mount
- CO2DM - Duct Mount

ECONOMIZER WITH AIRFOIL DAMPER BLADES AND BAROMETRIC RELIEF FOR ALLIED UNITS


LGH/LCH 036-072

Economizer CD 60 Airfoil Damper Assembly O/A & R/A

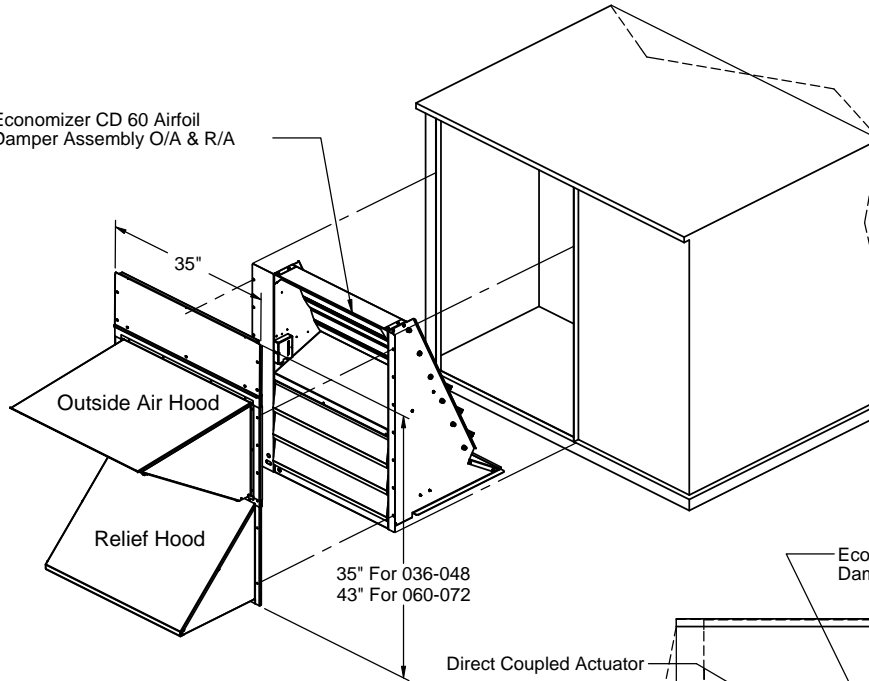

Only Ruskin Company Model CD-60 is AMCA Certified

PROVENT P/N	Wt.
ECODABXSDB (036-048) (Fully Modulating Dry Bulb)	135 Lb.
ECODABXSEN (036-048) (Fully Modulating Enthalpy)	
ECODABXLDB (060-072) (Fully Modulating Dry Bulb)	156 Lb.
ECODABXLEN (060-072) (Fully Modulating Enthalpy)	

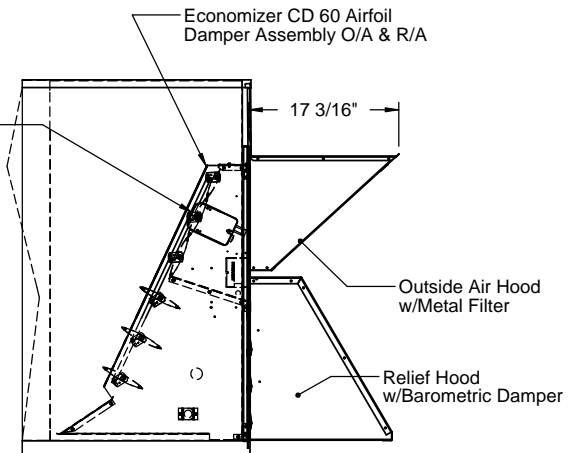

3847 WABASH DR.
MIRA LOMA, CA 91725

PHONE (951) 685-1101
FAX (619) 872-9799

SUBMITTED TO: _____
 COMPANY: _____
 JOB NAME: _____
 EQUIPMENT: _____
 NOTES: _____

FORM NO:

-

DATE:

9/12/2014

PART NUMBER:

ECODABX Series

REV:

2

DRAWN BY:

CNG