

**FEATURES**

- CA Title 24 Compliant.
- Direct coupled style actuator standard.
- Stainless steel damper side seals.
- AMCA certified CD-60 Airfoil dampers blades.
- Meets leakage rate as required by ASHRAE 90.1.
- External linkage system.
- Mechanically secured outside air intake filter.
- Capable of introducing up to 100% outdoor air.
- Metal Filter included:
  - PRS - 25-1/2" x 11" x 7/8" (exact).
  - PRL - 33-1/2" x 10-1/2" x 7/8" (exact).

**FEATURES (When Ordered With Control Options)**


- Fully modulating damper FDD compliant controls with enthalpy, dry bulb, and differential temperature sensor options.
- Selectable economizer changeover temperature set point.
- Requires part number 2ECO402 for Dual Enthalpy.
- CO2 controller standard.
  - Wall or duct mounted CO2 sensor provided as option:
    - CO2WM - Wall Mount
    - CO2DM - Duct Mount

**DOWN DISCHARGE ECONOMIZER WITH BAROMETRIC RELIEF FOR YORK UNITS:**

**ZX04-14, ZY04-12, ZQ04-06, XY04-09, XX08-12, XQ04-06, XXA7**

York Unit	ProVent P/N	"A"	"B"	"C"	"D"	Weight
ZX 04-07 ZY 04-06 ZQ 04-06 XY 04-06 XQ 04-06 XXA7	ECODPRSDB (Fully Modulating Dry Bulb)	17-3/16"	18-3/8"	33-1/4"	17-3/8"	81 Lbs.
	ECODPRSEN (Fully Modulating Enthalpy)					
ZX 08-14 ZY 07-12 XX 08-12 XY 07-09	ECODPRLDB (Fully Modulating Dry Bulb)	19-3/4"	23-7/16"	40-3/4"	22"	94 Lbs.
	ECODPRLEN (Fully Modulating Enthalpy)					

Prestige Large Cabinet Shown

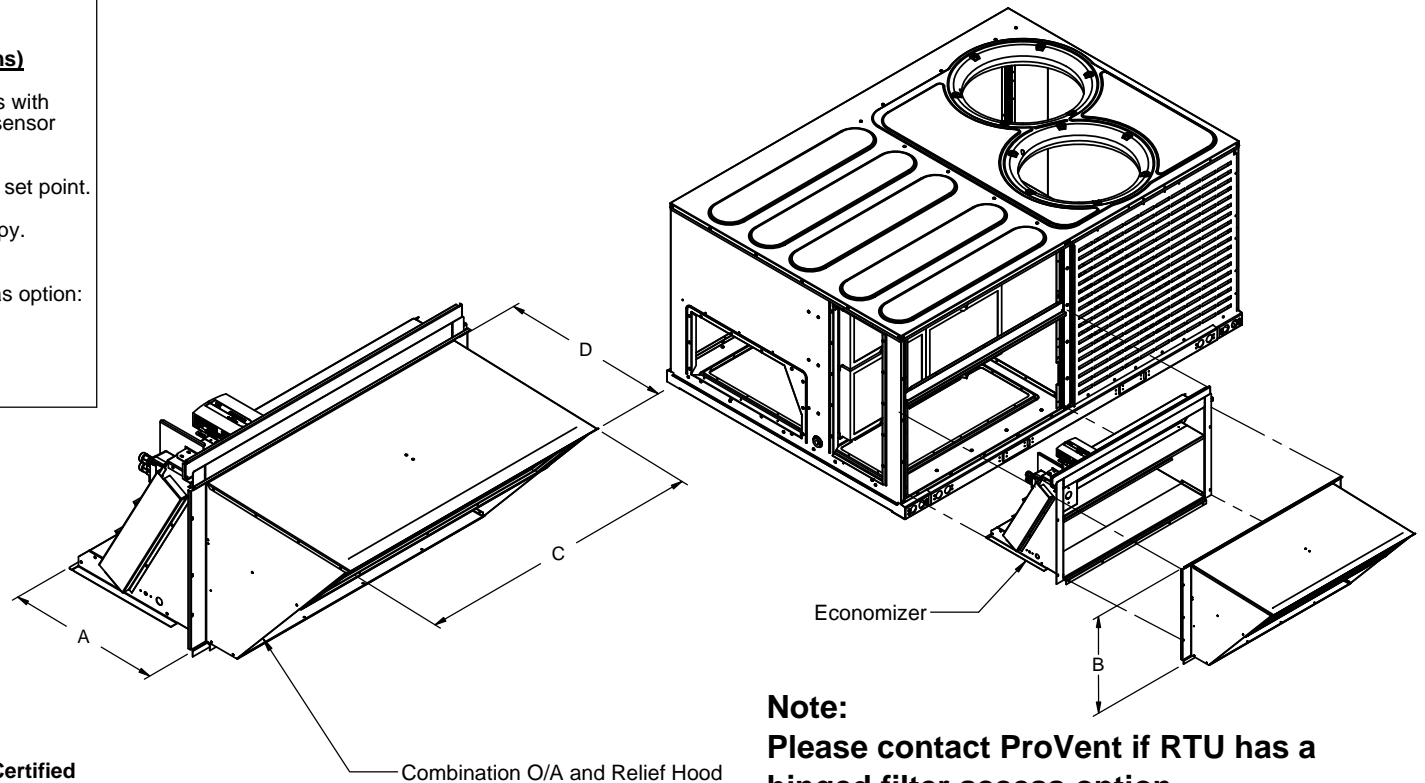

**Note:**  
Please contact ProVent if RTU has a hinged filter access option.



Only Ruskin Company Model CD-60 is AMCA Certified



3847 WABASH DR.  
MIRA LOMA, CA 91725

PHONE (951) 685-1101  
FAX (619) 872-9799

SUBMITTED TO: \_\_\_\_\_  
COMPANY: \_\_\_\_\_  
JOB NAME: \_\_\_\_\_  
EQUIPMENT: \_\_\_\_\_  
NOTES: \_\_\_\_\_

FORM NO:  
ECO-90

DATE:  
1/23/2018

PART NUMBER:  
ECODPR Series

REV:  
7

DRAWN BY:  
CNG