


FEATURES:

- Gasketing package provided.
- Insulation: 1"-1.5 lb. Density.
- Estimated Weight: 524 Lbs.
- All Galvanized Welded Construction.


ROOF CURB

EXISTING CARRIER:
48/50 DD, DF; 50EQ 024


FOR YORK UNITS:
ZJ/ZF/DJ/ZR/WJ/DH/DR/WR/DM 180-300 BP/BQ 240

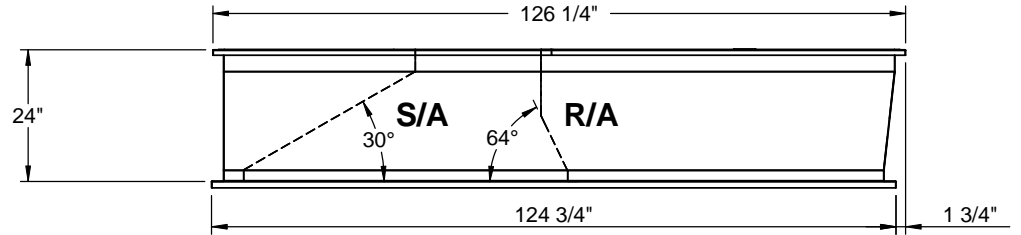


FRONT VIEW

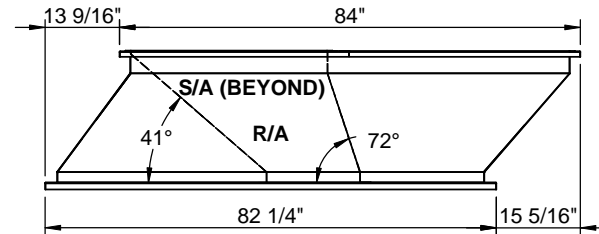

RIGHT VIEW

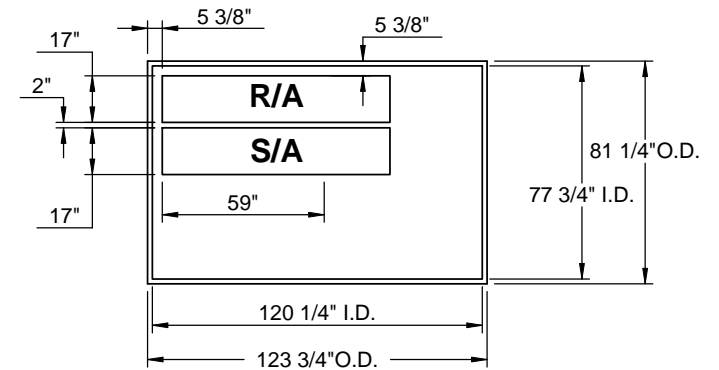

EXISTING CURB

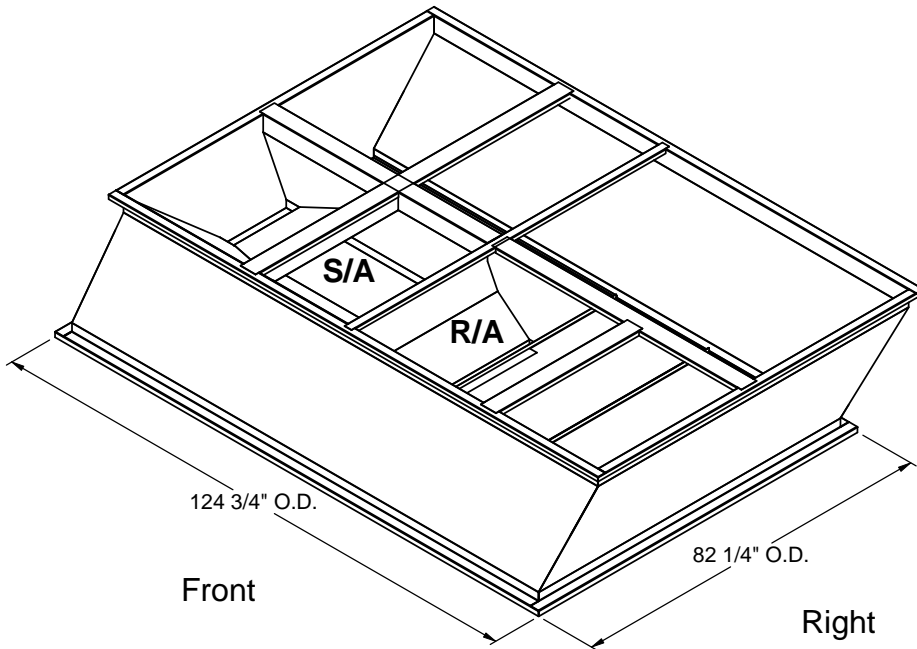

ISOMETRIC VIEW



1392 EAST PALOMAR STREET
SUITE 403-234
CHULA VISTA, CA 91913

PHONE (619) 498-9246
FAX (619) 872-9799

SUBMITTED TO: _____
COMPANY: _____
JOB NAME: _____
EQUIPMENT: _____
NOTES: _____

FORM NO: _____
DATE: 3/10/2011

PART NUMBER:
CA-SLM1830-CAR06
REV: 2
DRAWN BY:
FMM