

FEATURES

- Roof curb sides and ends are 16 ga. galvanized steel.
- Perimeter upper frame supplied with pre-punch assembly holes.
- Assembly hardware provided for field assembly.
- Gasketing package provided.
- Heat treated wood nailer provided.



NOTES

- Ductwork must be 3/4" smaller than duct openings shown.
- Adjust up to 1" in 12" pitch in either direction.
- Attach ductwork to roof curb. Flanges of duct rest on top of curb. Support ductwork below the curb.

KNOCK-DOWN ADJUSTABLE PITCH / ADJUSTABLE HEIGHT CURBS FOR YORK UNITS

ZX 08-14; XX 08-12; ZY 07-12; XY 07-09

ProVent P/N	A	B	WEIGHT
CBAKDPRL08	8"	12"	155 Lbs
CBAKDPRL11	11"	15"	169 Lbs
CBAKDPRL14	14"	18"	184 Lbs

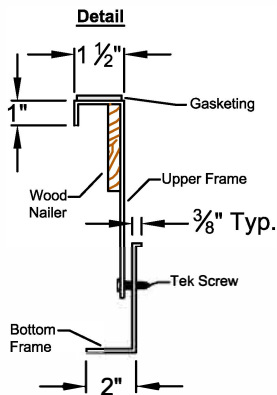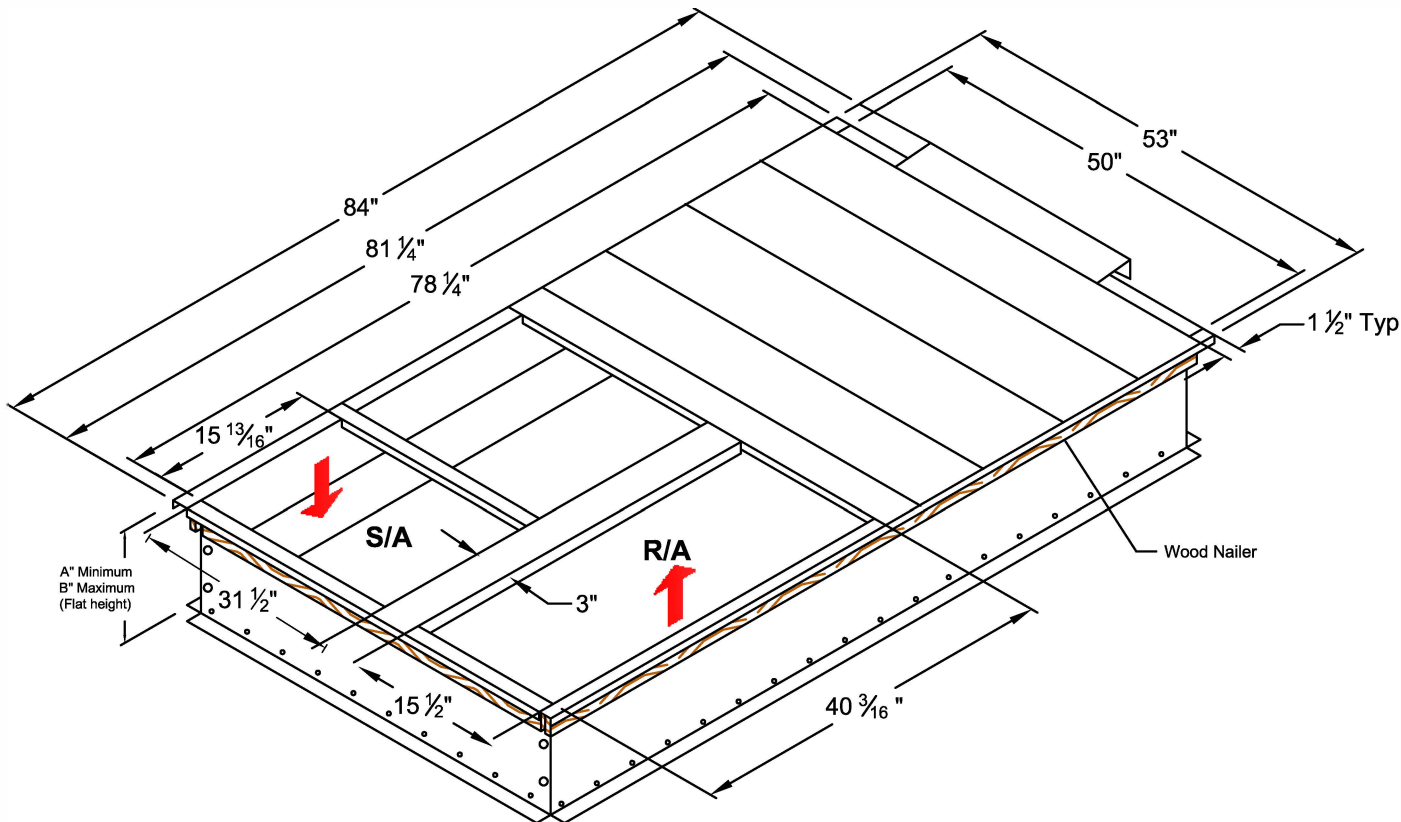

3847 WABASH DRIVE
MIRA LOMA, CA 91752

PHONE (951) 685-1101
FAX (619) 872-9799

SUBMITTED TO: _____
COMPANY: _____
JOB NAME: _____
EQUIPMENT: _____
NOTES: _____

FORM NO:
CBAKD-114

DATE:
11/16/17

PART NUMBER:
CBAKDPRL SERIES

DRAWN BY:
ALL