



INSTALLATION INSTRUCTIONS

0-25% Outside Air Hoods for York 3 - 6 Ton

Manual Fixed Blade OASUN3672F25 Series


&

Gravity Backdraft Blade OASUN367225 Series


Instructions

1. Unpack hood and panel. Hood is already attached to panel, ready for install.
2. Remove "Top" horizontal duct cover panel from unit (ILL. 1).
3. Install new panel with hood using screws from factory provided duct cover panel. For proper alignment, set top screw first.
4. Use same mounting position for horizontal configuration.

ILL. 1

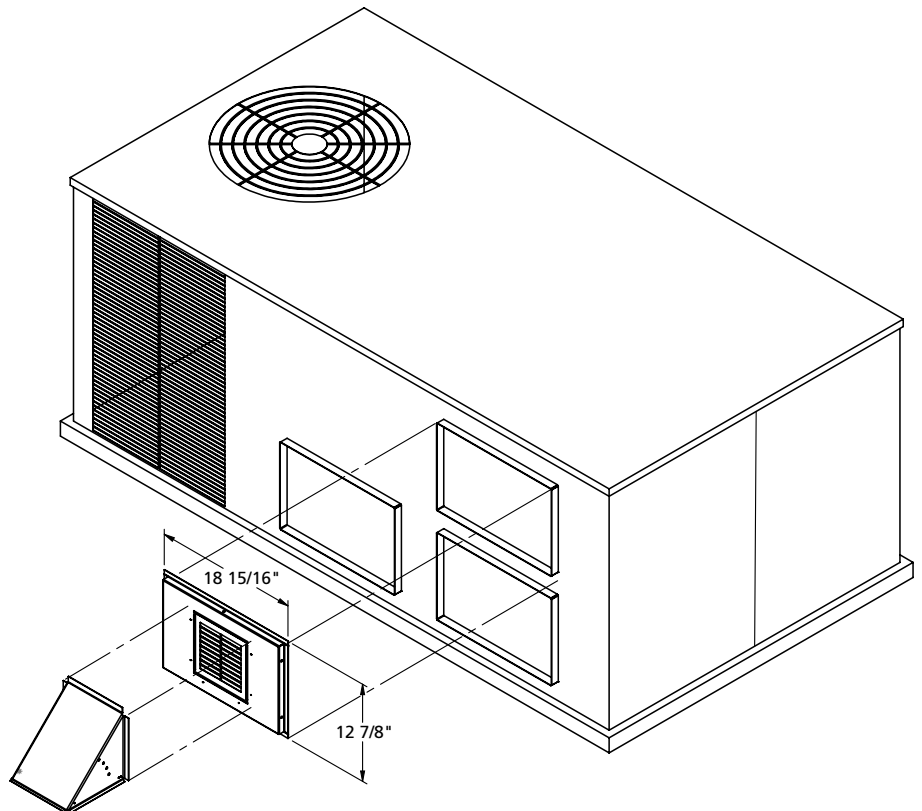


ILL. 2

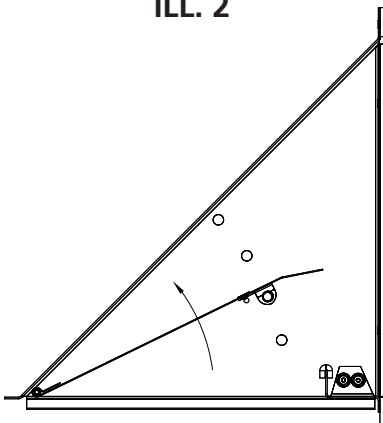

Manual Fixed Blade Position Setpoint
OAMANSUN3672 Series

ILL. 3

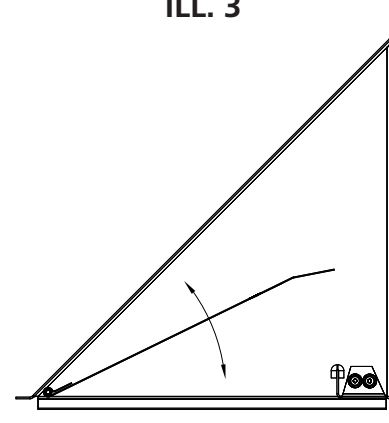

Backdraft Blade
OABDSUN3672 Series