


FEATURES:

- Painted hood and panels match factory specifications and color.
- Stainless steel low leak damper side seals.
- External linkage system.
- Mechanically secured upgraded outside air intake filter.
- Horizontal or down discharge. (Mounts in same position on unit).

**MANUAL OUTSIDE AIR HOOD PACKAGE 0-100%
FOR YORK UNITS**

ZX04-14; XXA7-12; ZY04-12; XY04-09; ZQ, XQ04-06

UNIT SIZE	PROVENT P/N	A	B	EST. WEIGHT
ZX04-07; XXA7; ZY, XY04-06 ZQ, XQ04-06	OAMANPRS100	19-7/16"	33-7/16"	55 Lbs.
ZX08-14; XX08-12; ZY07-12; XY07-09	OAMANPRL100	24-5/16"	40-15/16"	65 Lbs.

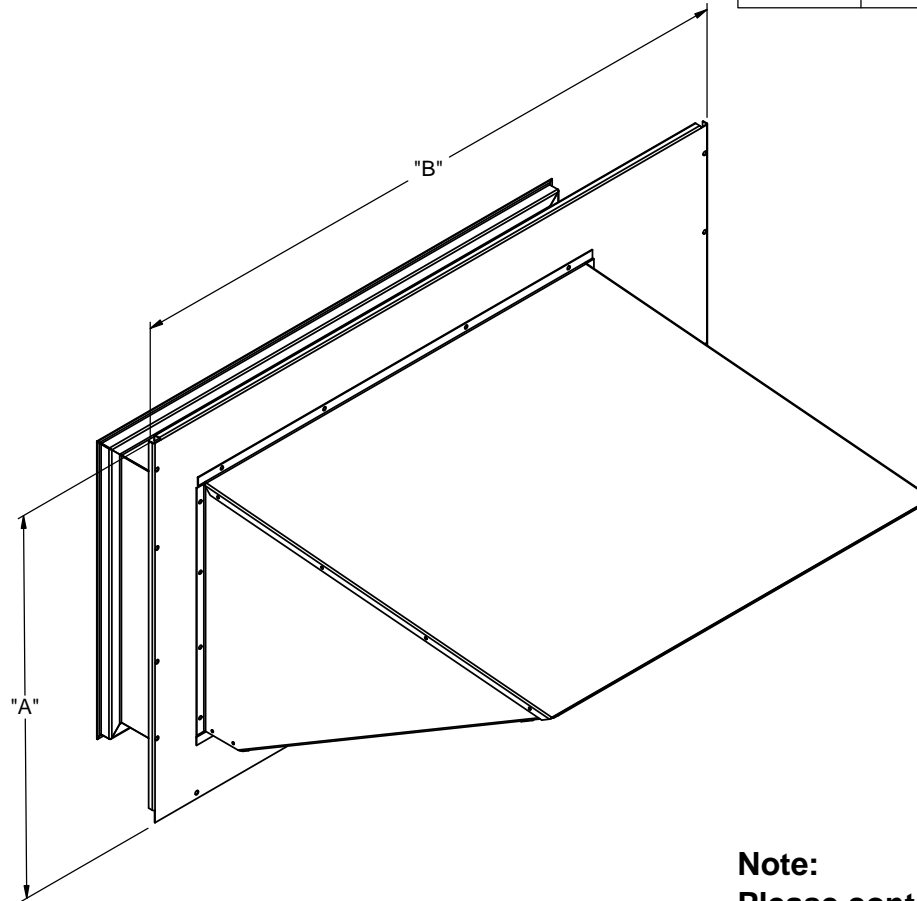

Note:
Please contact ProVent if RTU has a hinged filter access option.



3847 WABASH DRIVE
MIRA LOMA, CA 91752

PHONE (951) 685-1101
FAX (619) 872-9799

SUBMITTED TO: _____
COMPANY: _____
JOB NAME: _____
EQUIPMENT: _____
NOTES: _____

FORM NO:
OA-138

PART NUMBER:
-

DATE:
9/17/2018

REV:
1

DRAWN BY:
JG