

FEATURES

- Roof curb sides and ends are 16 ga. galvanized steel.
- Perimeter upper frame supplied with pre-punched assembly holes.
- Assembly hardware provided for filed assembly.
- Gasketing package provided.
- Heat treated wood nailer provided.
- Insulated deck pans included.



Notes

- Ductwork must be 3/4" smaller than duct openings show.
- Adjust up to 1" in 12" pitch in either direction.
- Attach ductwork to roof curb. Flanges of duct rest on top of the curb. Support ductwork below the curb.

KNOCK DOWN ADJUSTABLE PITCH / ADJUSTABLE HEIGHT CURBS FOR ALLIED UNITS

KG/KCA 090S; KHA 072S

PROVENT P/N	A	B	EST. WEIGHT
CBAKDABK08	8"	12"	98 Lbs.
CBAKDABK11	11"	15"	127 Lbs.
CBAKDABK14	14"	19"	149 Lbs.
CBAKDABK24	24"	29"	219 Lbs.

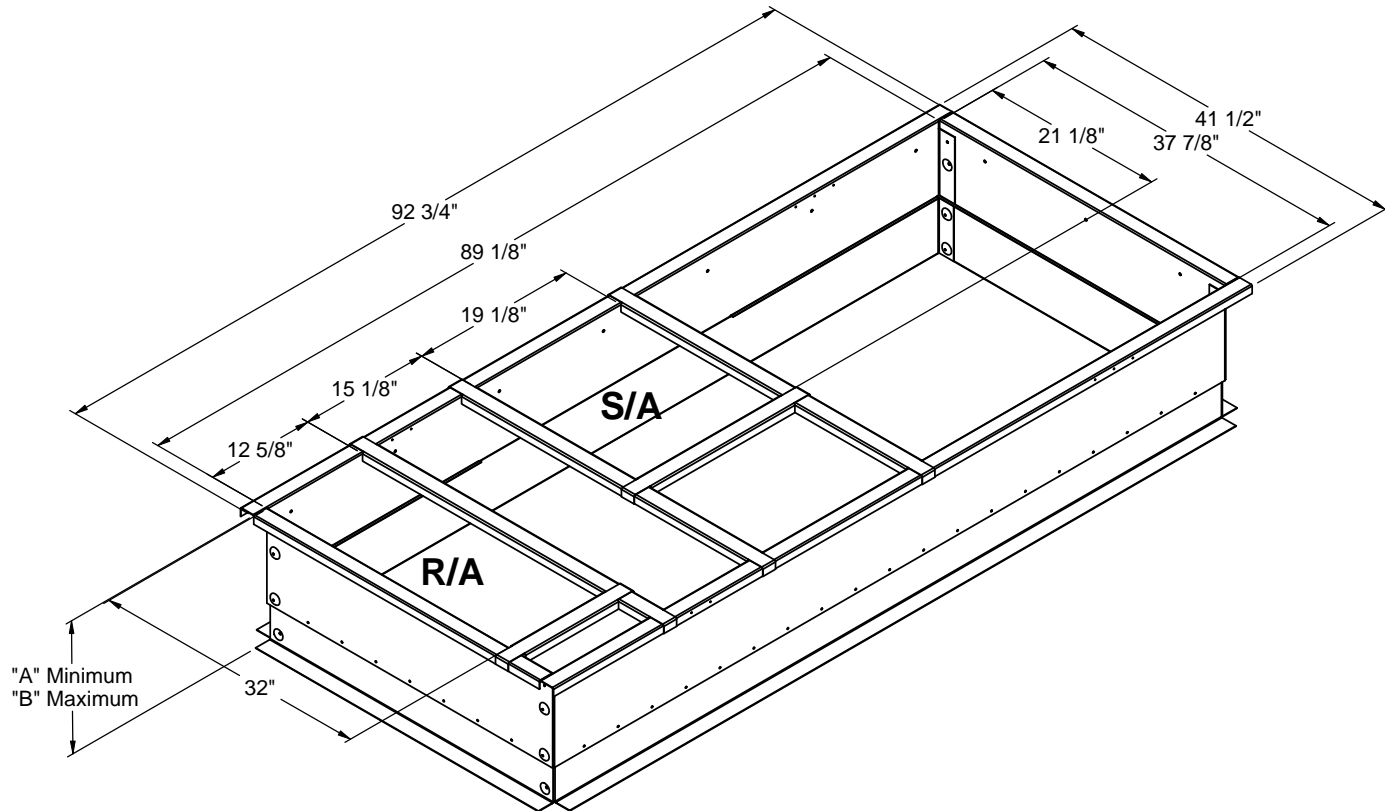

DETAIL



3847 WABASH DR.
MIRA LOMA, CA 91725

PHONE (951) 685-1101
FAX (619) 872-9799

SUBMITTED TO: _____
 COMPANY: _____
 JOB NAME: _____
 EQUIPMENT: _____
 NOTES: _____

FORM NO: _____
 -
 DATE: 9/4/2013

PART NUMBER: CBAKDABK SERIES
 REV: -
 DRAWN BY: CNG