

FEATURES

- Roof curb sides and ends are 14 ga. galvanized steel.
- Fully welded construction.
- Gasketing package provided.
- Heat treated wood nailer provided.
- Calculated curbs are available.
- Restraints and springs have OSHPD pre-approval, OPA #0070.



NOTES

- Attach ductwork to roof curb. Flange of duct rest on top of curb. Support ductwork below the curb.

VIBRATION ISOLATION CURB FOR YORK UNITS

YPAL (ECO2) 50-65 TON UNITS R-410A

Provent P/N	A	B	WEIGHT
CBISYP506522	11"	22"	1871 Lbs
CBISYP506525	14"	25"	1953 Lbs

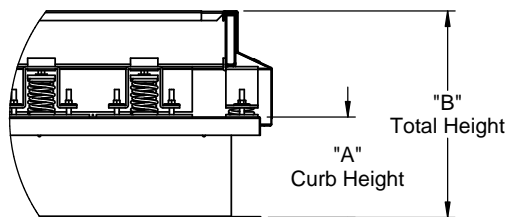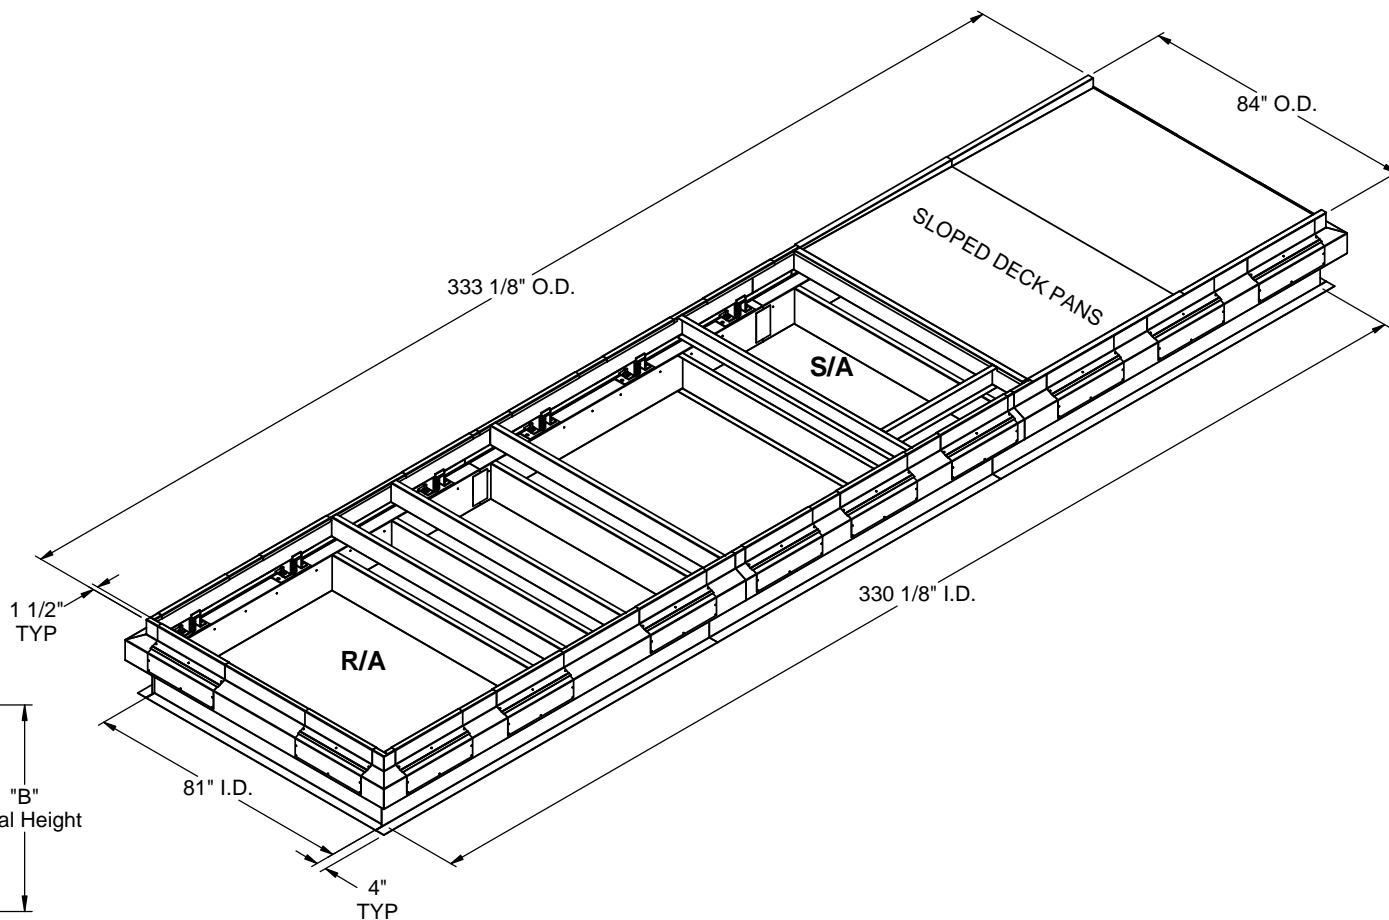

PROFILE DETAIL



3847 WABASH DRIVE
MIRA LOMA, CA 91752

PHONE (951) 685-1101
FAX (619) 872-9799

SUBMITTED TO: _____
 COMPANY: _____
 JOB NAME: _____
 EQUIPMENT: _____
 NOTES: _____

FORM NO:
CBIS-107

PART NUMBER:
CBISYP5065 SERIES

DATE:
11/12/2015

REV:
5

DRAWN BY:
CNG