

FEATURES

- Roof curb sides and ends are 16 ga. galvanized steel.
- Perimeter upper frame supplied with pre-punch assembly holes.
- Assembly hardware provided for field assembly.
- Gasketing package provided.
- Heat treated wood nailer provided.


NOTES

- Ductwork must be 3/4" smaller than duct openings shown.
- Adjust up to 1" in 12" pitch in either direction.
- Attach ductwork to roof curb. Flanges of duct rest on top of curb. Support ductwork below the curb.


KNOCK-DOWN ADJUSTABLE PITCH / ADJUSTABLE HEIGHT CURBS FOR YORK UNITS

ZX, KX08-14; XX, WX08-12; XY, WY, ZY, KYA7
ZY, KY07-12; XY, WY07-09; ZL, KL08-14

ProVent P/N	A	B	WEIGHT
CBAKDPRL08	8"	12"	155 Lbs
CBAKDPRL11	11"	15"	169 Lbs
CBAKDPRL14	14"	18"	184 Lbs
CBAKDPRL21	21"	25"	203 Lbs

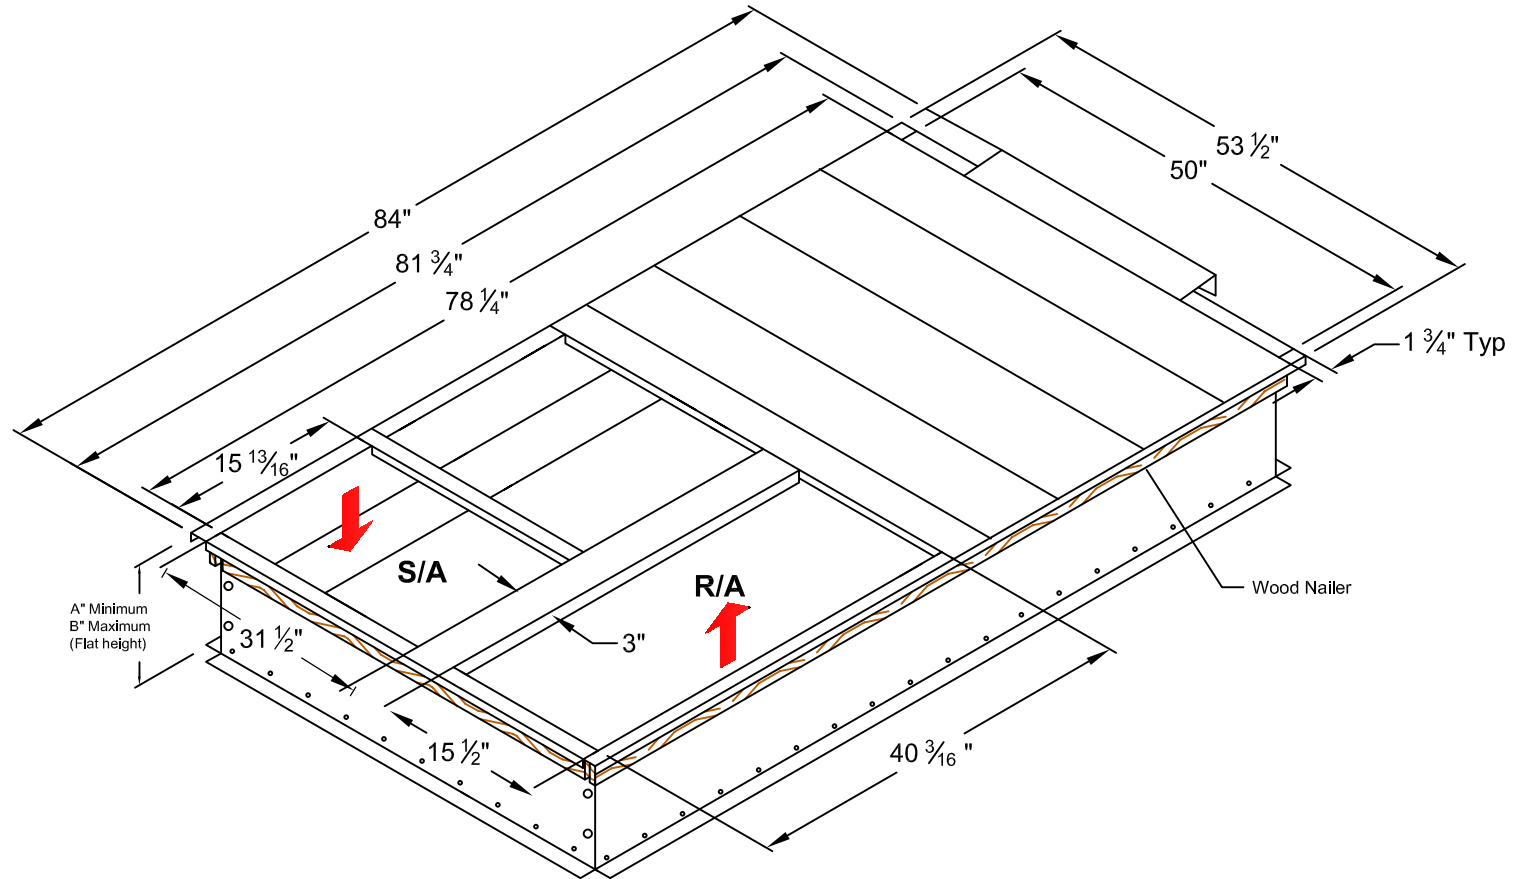

Detail

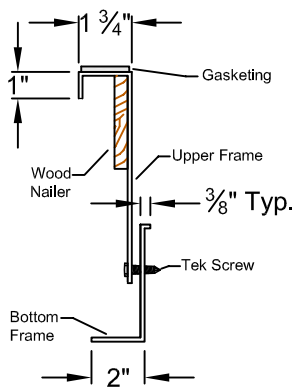

3847 WABASH DRIVE
MIRA LOMA, CA 91752

PHONE (951) 685-1101
FAX (619) 872-9799

SUBMITTED TO: _____
COMPANY: _____
JOB NAME: _____
EQUIPMENT: _____
NOTES: _____

FORM NO:
CBAKD-114

DATE:
11/12/24

PART NUMBER:
CBAKDPRL SERIES

DRAWN BY:
CNG