

**FEATURES:**

- Roof curb sides and ends are 16 ga. galvanized steel.
- Fully welded construction.
- Gasketing package provided.
- Heat treated wood nailer provided.
- Pitched curbs and taller curbs are available.
- CalDyn OSHPD pre-approved 2" deflection seismic restraints. (OPA-0070) JQA.

**NOTES**



Attach ductwork to roof curb. Flanges of duct rest on top of curb. Support ductwork below the curb.

**VIBRATION ISOLATION ROOF CURB FOR YORK UNITS**

PCG4B, PCE4B 048-060 / PHE4B, PHG4B 036-060

PROVENT P/N	A	B	WEIGHT
CBISLXL18**	8"	18"	175 Lbs.
CBISLXL21**	11"	21"	193 Lbs.
CBISLXL24**	14"	24"	211 Lbs.

**\*\*Note:** Spring configuration must be added to part number at time of order.

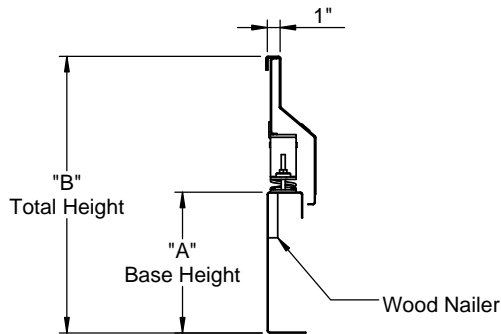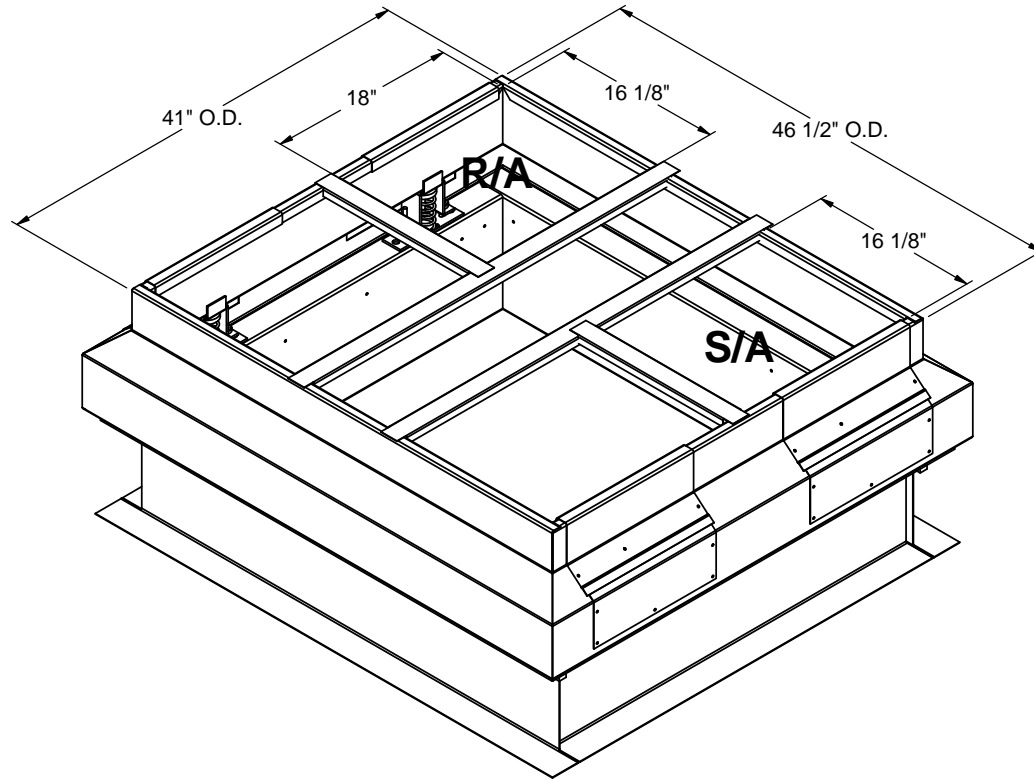

SIDE VIEW DETAIL



3847 WABASH DR.  
MIRA LOMA, CA 91752

PHONE (951) 685-1101  
FAX (619) 872-9799

JOB NAME: \_\_\_\_\_  
ADDRESS: \_\_\_\_\_  
\_\_\_\_\_  
NOTES: \_\_\_\_\_  
\_\_\_\_\_

FORM NO:  
CBIS-120

DATE:  
8/23/2015

PART NUMBER:  
CBISLXL SERIES

REV:  
2

DRAWN BY:  
CNG