

FEATURES

- Roof curb sides and ends are 16 ga. galvanized steel.
- Perimeter upper frame supplied with pre-punch assembly holes.
- Assembly hardware provided for field assembly.
- Gasketing package provided.
- Heat treated wood nailer provided.


NOTES

- Ductwork must be 3/4" smaller than duct openings shown.
- Adjust up to 1" in 12" pitch in either direction.
- Attach ductwork to roof curb. Flanges of duct rest on top of curb. Support ductwork below the curb.


KNOCK-DOWN ADJUSTABLE PITCH / ADJUSTABLE HEIGHT CURBS FOR YORK UNITS

ZX, KX04-07; XX, WX, ZX, KXA7; ZY, ZQ, XY, XQ, ZL, KY, KQ, WY, WQ, KL04-06

ProVent P/N	A	B	WEIGHT
CBAKDPRS08	8"	12"	104 Lbs
CBAKDPRS11	11"	15"	122 Lbs
CBAKDPRS14	14"	18"	145 Lbs

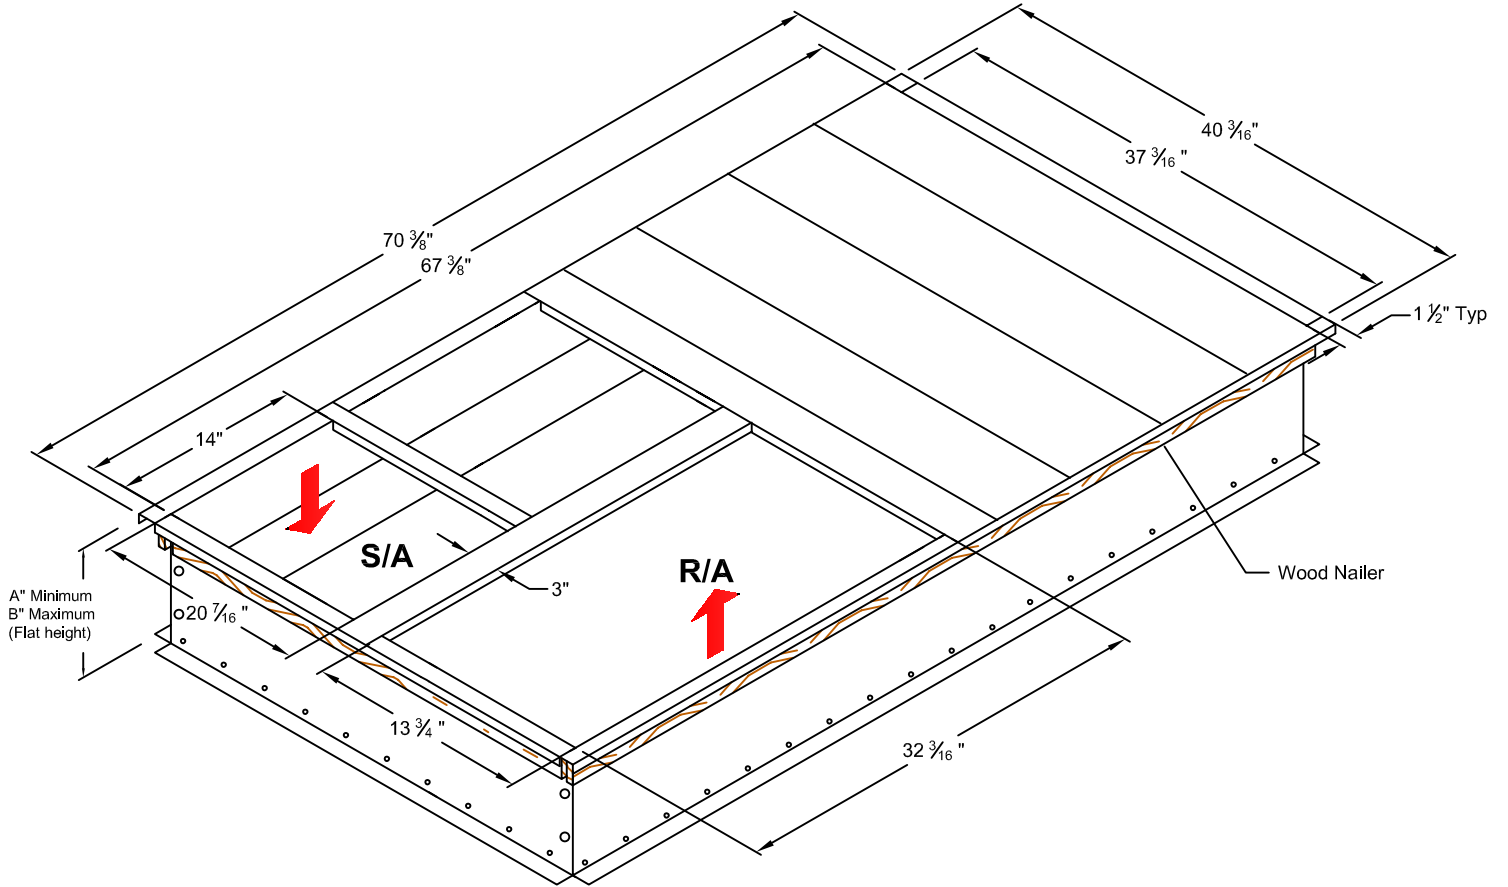

Detail

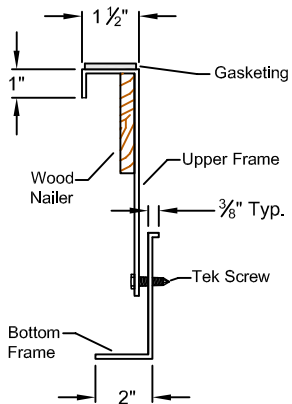

3847 WABASH DRIVE
MIRA LOMA, CA 91752

PHONE (951) 685-1101
FAX (619) 872-9799

SUBMITTED TO: _____
COMPANY: _____
JOB NAME: _____
EQUIPMENT: _____
NOTES: _____

FORM NO:
CBAKD-116

DATE:
02/04/2025

PART NUMBER:
CBAKDPRS SERIES

DRAWN BY:
CNG