

For wood, concrete and steel attachments see Roof Anchorage Detail, Form No. CB-25A.

Will conform to wind load code requirements for knock-down or pre-assembled application. (Contact factory for assembled version.)


CALCULATED WIND ROOF CURBS FOR YORK UNITS

P***B ALL MODELS


ProVent P/N	A	WEIGHT
80-265-5014	14"	139 Lbs
80-265-5018	18"	163 Lbs

Meets wind requirements for the following codes:
FBC 2017
based on ASCE 7-10.



Wind:
190 mph exposure D category III or IV building, max BLDG height: 60 ft
Kzt=1.00 max

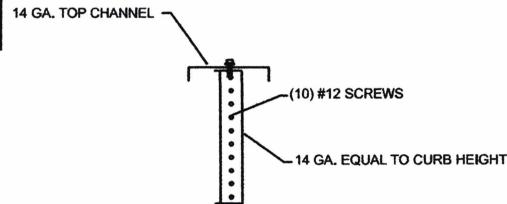


INTERIOR CURB SUPPORT

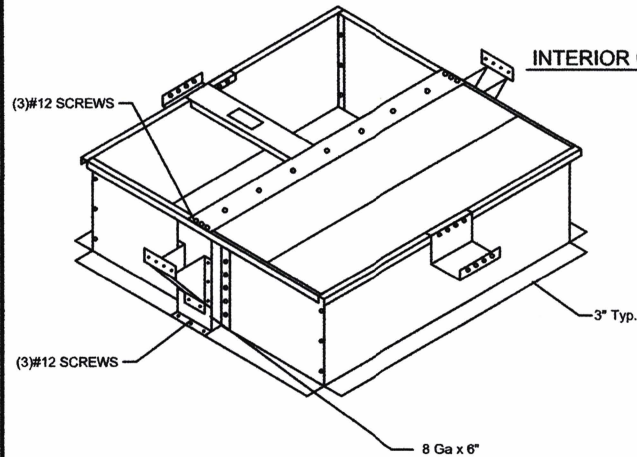


INTERIOR CURB SUPPORT WITH TOP CHANNEL

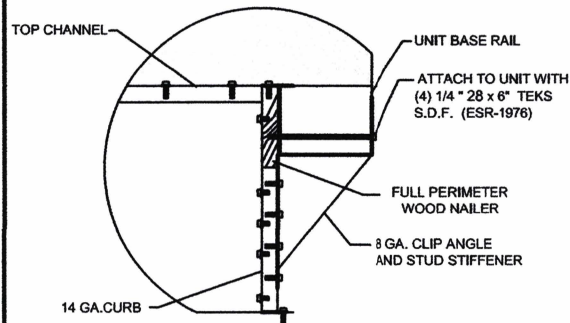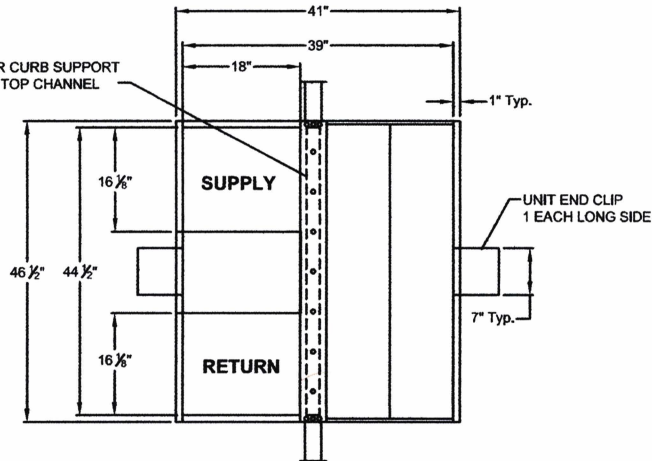


HOLD DOWN DETAIL

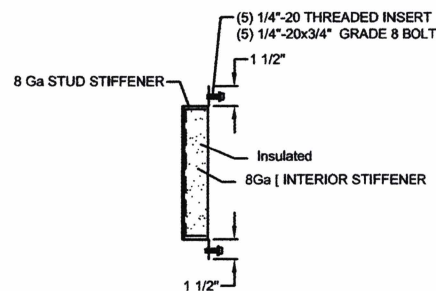

STUD STIFFENER

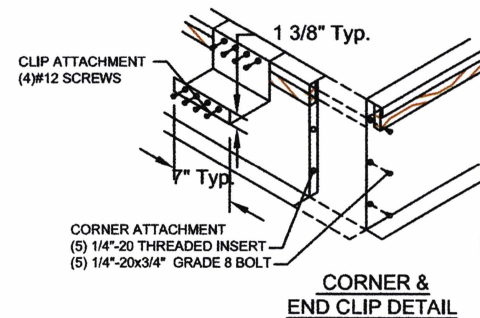

CORNER & END CLIP DETAIL

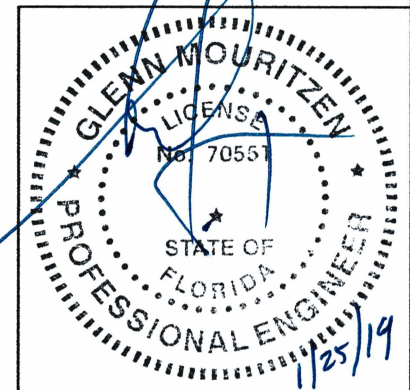

RRS ROOFTOP SYSTEMS

1625 DIPLOMAT DRIVE
CARROLTON, TX 75006

PHONE (972) 247-7447
FAX (972) 243-0940

SUBMITTED TO: _____
COMPANY: _____
JOB NAME: _____
EQUIPMENT: _____
NOTES: _____

FORM NO:
CBKD-161A

DATE:
01/07/19

REV:
-

PART NUMBER:
80-265-50

DRAWN BY:
FMM