## **FEATURES**

- CA Title 24 and FDD Compliant.
- · Direct coupled style actuator standard.
- · Stainless steel damper side seals.
- AMCA certified CD-60 Airfoil dampers blades.
- Meets leakage rate as required by ASHRAE 90.1.
- · External linkage system.
- · Mechanically secured outside air intake filter.
- Metal Filter 25-1/2" x 26-3/8" x 7/8" (exact) included

## FEATURES (When Ordered With Control Options)


- Fully modulating damper controls with enthalpy, dry bulb and differential temperature sensor options.
- Selectable economizer changeover temperature set point.
- · Requires part number 6210-0046 for Dual Enthalpy.
- · CO2 controller standard.

Wall or duct mounted CO2 sensor provided as option:

- CO2WM Wall Mount
- CO2DM Duct Mount


## **LEED ECONOMIZER OPTION**

- ProVent P/N: FLOWECPRD3715
- Outside air measurement for dilution utilizing thermal dispersion technology and ASHRAE 62.1 2007 compliant. Provides LEED credit by supplying feedback on ventilition system performance ensuring that the ventilation system maintains design requirements.
- · Factory installed onto economizer standard.
- Provides analog outputs for BMS, visual or audible alert, and generates an alarm when conditions vary by 10% or more of set point.



## DOWN DISCHARGE ECONOMIZER WITH BAROMETRIC RELIEF FOR YORK UNITS

ZT, ZH, ZJ, ZR, KT, KJ 037-150 ZF, XP, ZB, WP, KB, DH/DM/DF/DR/DJ/BP 078-150

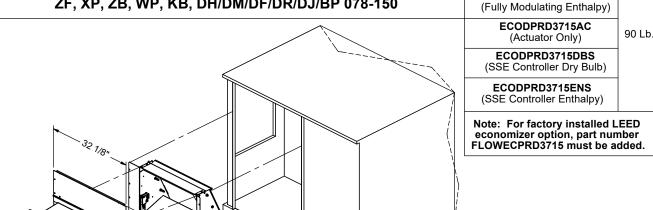


PROVENT P/N

**ECODPRD3715DBJ** (Fully Modulating Dry Bulb)

ECODPRD3715ENJ

25 5/16"

Wt.

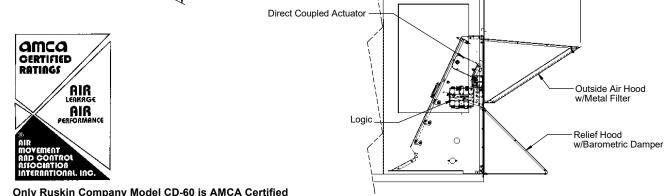

Economizer CD 60 Airfoil

Damper Assembly O/A & R/A



3847 WABASH DR. MIRA LOMA, CA 91752

Outside Air Hood

Relief Hood

47 3/8"

PHONE (951) 685-1101 FAX (619) 872-9799

BMITTED TO:	FORM NO:	ECODPRD3715 Series	
COMPANY:	ECO-184		
JOB NAME:			
EQUIPMENT:	<b>DATE</b> : 1/9/2025	<b>REV</b> : 12	DRAWN BY: CNG
NOTES:	1/9/2023	12	CNG