

## FEATURES

- CA Title 24 Compliant.
- Direct coupled style actuator standard.
- Stainless steel damper side seals.
- **AMCA certified CD-60 Airfoil dampers blades.**
- **Meets leakage rate as required by ASHRAE 90.1.**
- External linkage system.
- Mechanically secured outside air intake filter.
- Capable of introducing up to 100% outdoor air.
- Relief hood provided for horizontal duct mount.
- Metal Filter 25-1/2" x 11"x 1" included.

## FEATURES (When Ordered With Control Options)

- Fully modulating damper controls with enthalpy, dry bulb and differential temperature sensor options.
- Selectable economizer changeover temperature set point.
- CO2 compatible with DCV.

Wall or duct mounted CO2 sensor provided as option:

- CO2WM - Wall Mount
- CO2DM - Duct Mount



## HORIZONTAL ECONOMIZER WITH BAROMETRIC RELIEF FOR YORK UNITS

PG3E, PC3E, PCG4B, PCE4B 48-60  
PCG6B, PCE6B, PHE4/6B, PHG4/6B 36-60

### ProVent P/N

ECOHLXLAC1  
(Actuator Only, 2-10 VDC)


ECOHLXLDDB1  
(Fully Modulating Dry Bulb)

ECOHLXLLEN1  
(Fully Modulating Enthalpy)

**Note: For factory installed LEED economizer option, part number FLOWECLXL must be added.**

### Wt.

53 Lb.

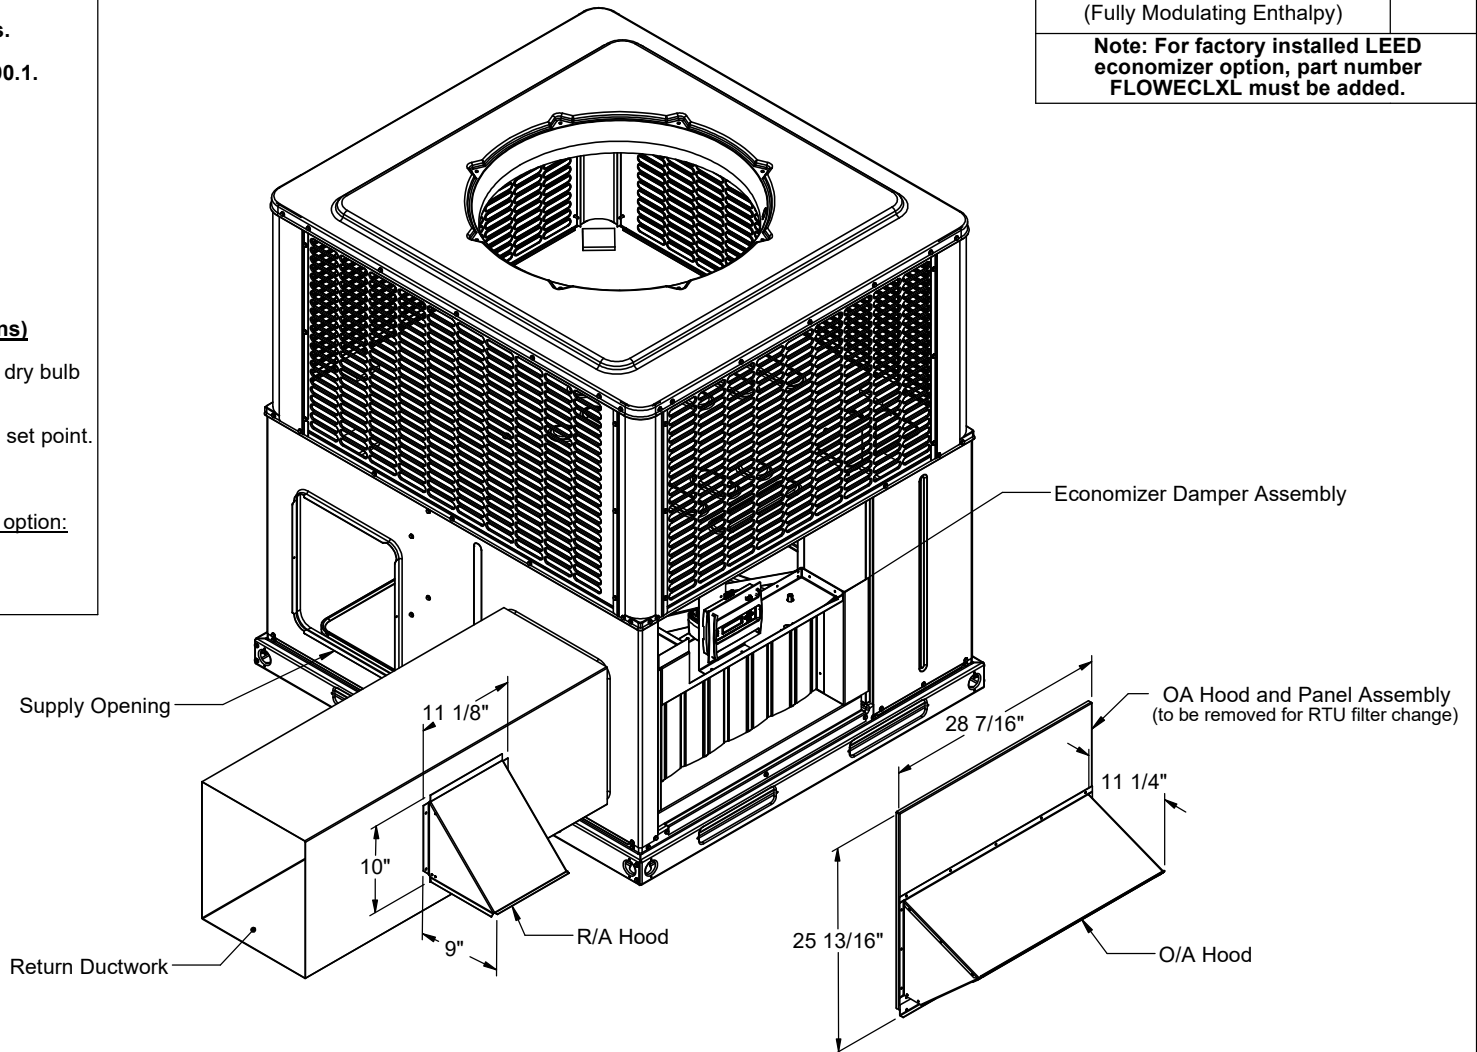

3847 WABASH DRIVE  
MIRA LOMA, CA 91752

PHONE (951) 685-1101  
FAX (619) 872-9799

SUBMITTED TO: \_\_\_\_\_  
COMPANY: \_\_\_\_\_  
JOB NAME: \_\_\_\_\_  
EQUIPMENT: \_\_\_\_\_  
NOTES: \_\_\_\_\_

### FORM NO:

ECO-266

### DATE:

3/7/2025

### PART NUMBER:

ECOHLXL-1 Series

### REV:

2

### DRAWN BY:

CNG