


FEATURES

- 2-position option includes a built in damper position limit stop.
- CO2 capable option includes logic module with DCV.
- 2-10vdc Actuator standard.
- Ruskin CD60 low-leak dampers.
- External linkage system.
- Mechanically secured outside air intake filter. (19" X 16-1/16" X 7/8")
- Horizontal or down discharge. (Mounts in same position on RTU).



0-100% OUTSIDE AIR 2-POSITION AND CO2 CAPABLE HOOD FOR YORK UNITS

ZR, XN, XP, WN 036-060
ZE, ZF, KE 036-072

RTU CONTROLS	PROVENT P/N	DESCRIPTION	Wt.
ALL	OA2POSUN3672100BL	2-POSITION ACTUATOR	30 Lb.
SIMPLICITY LITE	OA2POSUN3672100VCO2	MODULATING ACTUATOR WITH RRS CO2 CAPABLE LOGIC MODULE	
SIMPLICITY ELITE (SSE)	OA2POSUN3672100VCO2S	MODULATING ACTUATOR WITH SSE CO2 CAPABLE LOGIC MODULE	

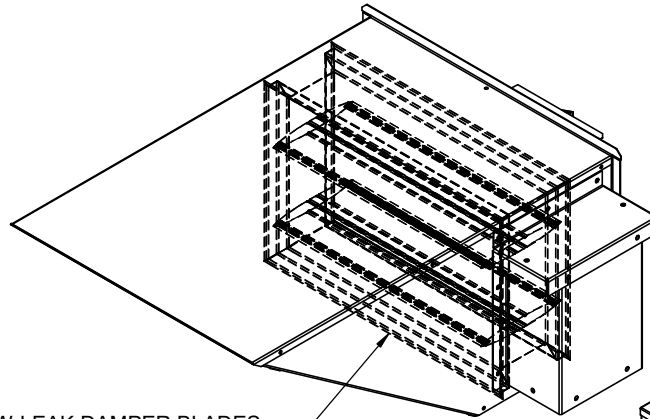

LOW-LEAK DAMPER BLADES

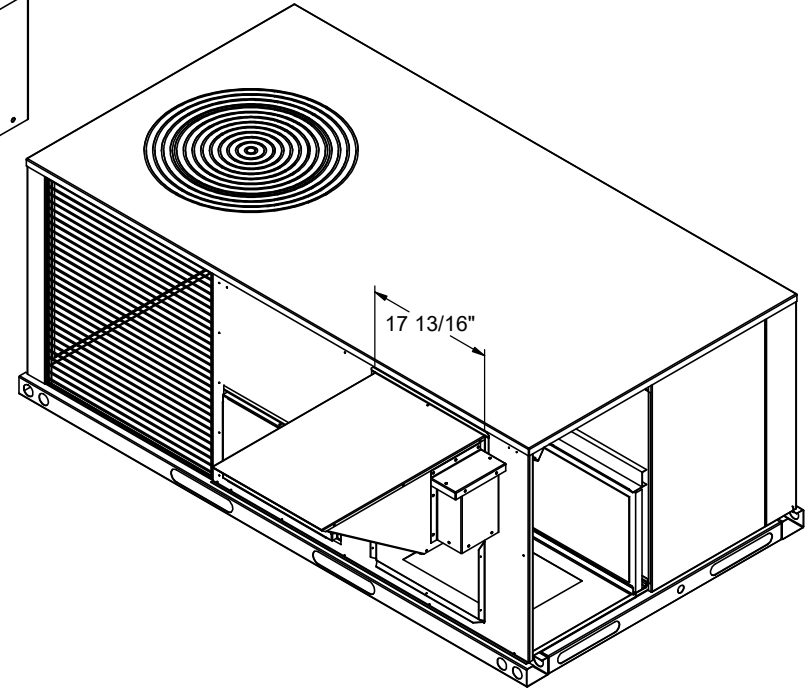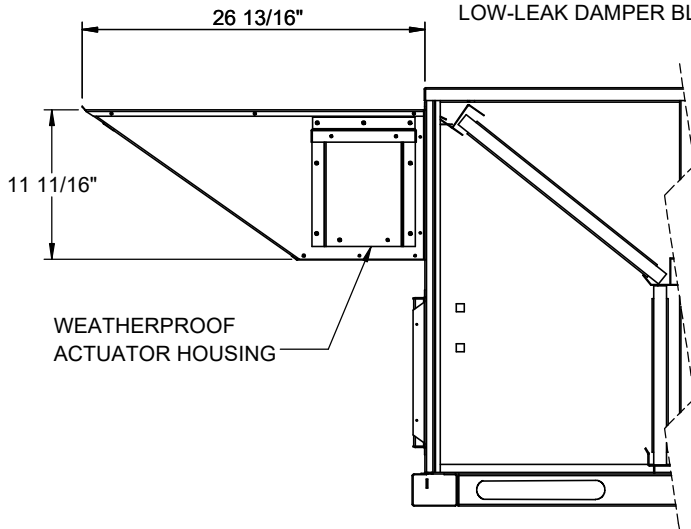

3847 WABASH DR.
MIRA LOMA, CA 91752

PHONE (951) 685-1101
FAX (619) 872-9799

SUBMITTED TO: _____
COMPANY: _____
JOB NAME: _____
EQUIPMENT: _____
NOTES: _____

FORM NO:
OA-02

DATE:
01/22/25

PART NUMBER:
OA2POSUN SERIES

REV: 3
DRAWN BY: CNG