

FEATURES

- Includes new Outside Air hood.
- Access for motor, blower, and blower drives.
- Adjustable motor sheave.
- Motor with automatic internal thermal protection.
- Modulating option includes fully programmable (factory set) variable frequency drive controlled by a differential pressure transducer designed to continuously monitor space pressure.

DOWN DISCHARGE CENTRIFUGAL POWER EXHAUST FOR YORK CORE UNITS

ZX08-14; XX08-12; XYA7, ZYA7; ZY07-12; XY07-09; ZL08-14



VOLTAGE	External Static (in. W.G)				FLA	Hp	Est. Wt
	0.1	0.2	0.3	0.4			
230V/3Ph	4,400 cfm	4,300 cfm	4,100 cfm	3,900 cfm	3.2	2	170 Lbs.
460V/3Ph					1.6		

PLEASE NOTE:

1. Return air duct, dampers, return air grills are specific for each unit.
2. For proper electrical wire sizing, Provent power exhaust full load amps need to be added to equation.

ProVent P/N

CONSTANT VOLUME	MODULATING
PEDCPRL25C 208/230V 3Ph	PEDCPRL25M 208/230V 3Ph
PEDCPRL46C 460V 3Ph	PEDCPRL46M 460V 3Ph

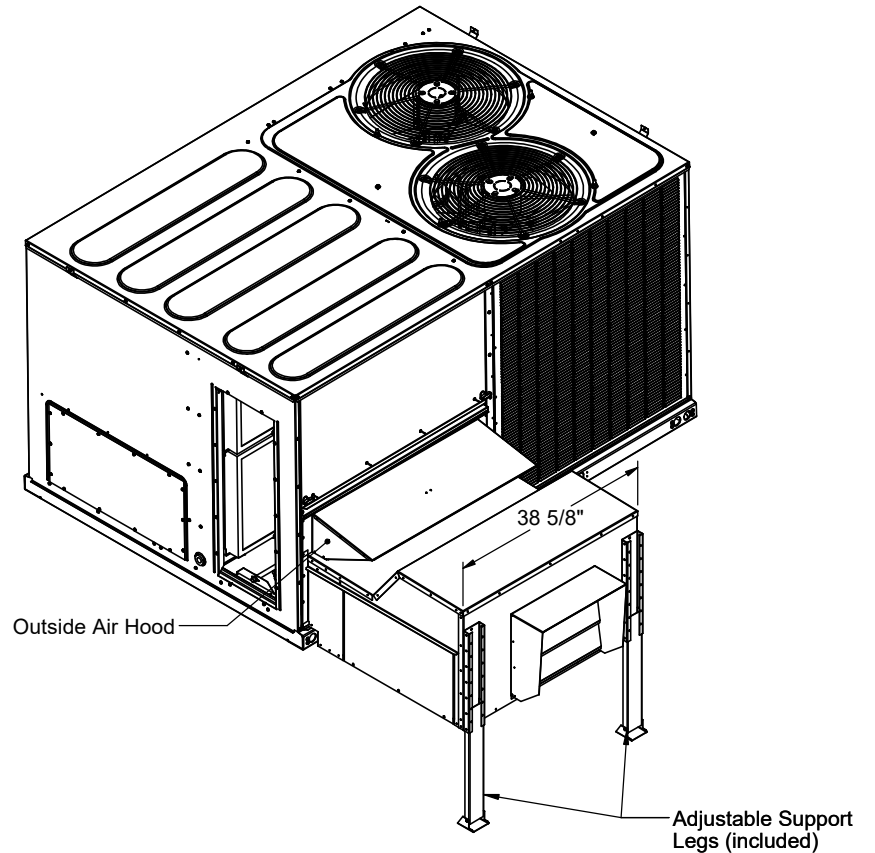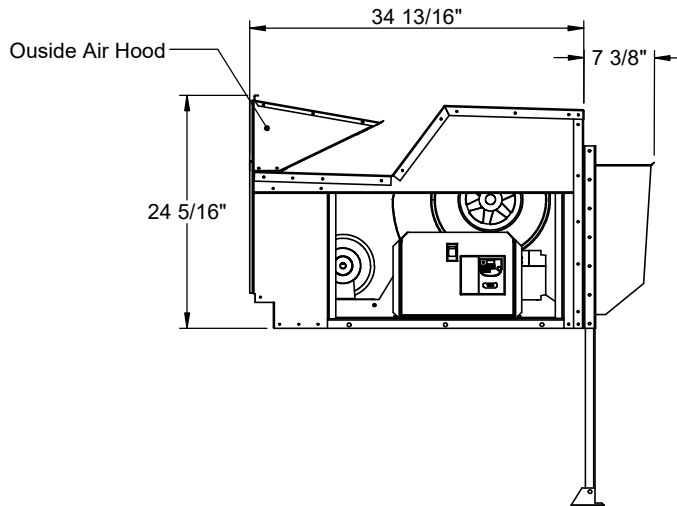

Note:
Please contact ProVent if RTU has a hinged filter access option.



3847 WABASH DR.
MIRA LOMA, CA 91725

PHONE (951) 685-1101
FAX (619) 872-9799

SUBMITTED TO: _____
COMPANY: _____
JOB NAME: _____
EQUIPMENT: _____
NOTES: _____

FORM NO:
PE-93

DATE:
5/2/2024

PART NUMBER:
PEDCPRL SERIES

REV:
2

DRAWN BY:
CNG