

**FEATURES**

- Includes new Outside Air hood.
- Access for motor, blower, and blower drives.
- Adjustable motor sheave.
- Motor with automatic internal thermal protection.
- Modulating option includes fully programmable (factory set) variable frequency drive controlled by a differential pressure transducer designed to continuously monitor space pressure.

**DOWN DISCHARGE CENTRIFUGAL POWER EXHAUST FOR YORK CORE UNITS**

ZX,KX08-14; XX,WX08-12; XY,WYA7; ZY,KYA7; ZY,KY07-12; XY,WY07-09; ZL,KL08-14

| VOLTAGE  | External Static (in. W.G) |           |           |           | FLA | Hp | Est. Wt  |
|----------|---------------------------|-----------|-----------|-----------|-----|----|----------|
|          | 0.1                       | 0.2       | 0.3       | 0.4       |     |    |          |
| 230V/3Ph | 4,400 cfm                 | 4,300 cfm | 4,100 cfm | 3,900 cfm | 5.6 | 2  | 170 Lbs. |
| 460V/3Ph |                           |           |           |           | 2.8 |    |          |

**PLEASE NOTE:**

1. Return air duct, dampers, return air grills are specific for each unit.
2. For proper electrical wire sizing, Provent power exhaust full load amps need to be added to equation.

**ProVent P/N**

**CONSTANT VOLUME**



**MODULATING**

**PEDCPRL25C**  
208/230V 3Ph

**PEDCPRL25M**  
208/230V 3Ph

**PEDCPRL46C**  
460V 3Ph

**PEDCPRL46M**  
460V 3Ph

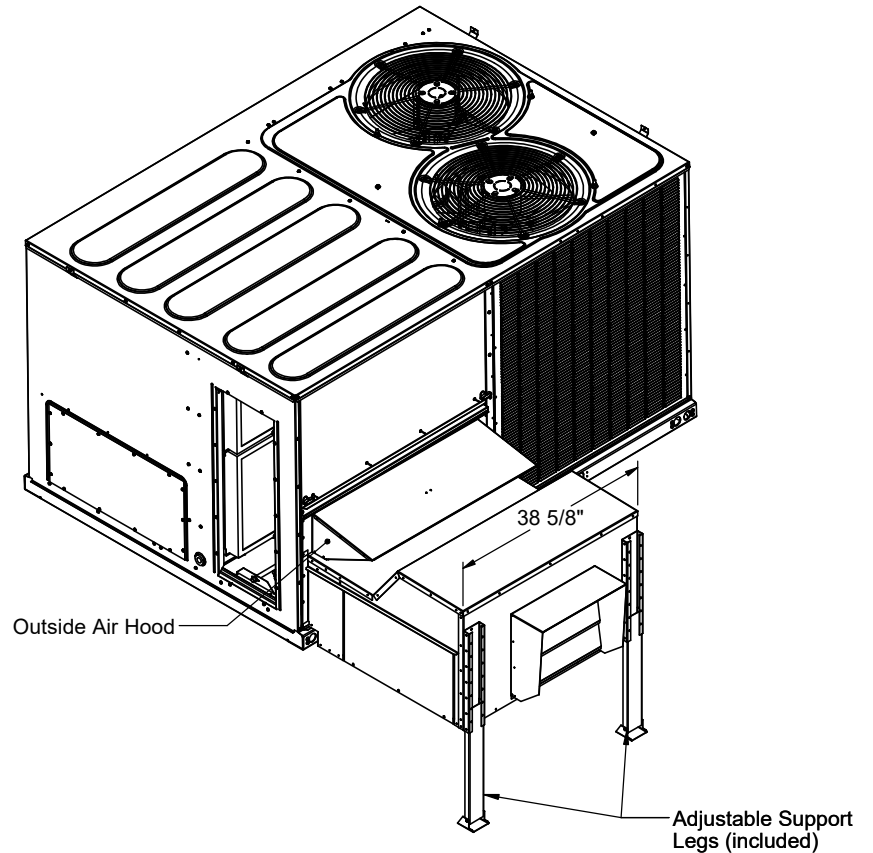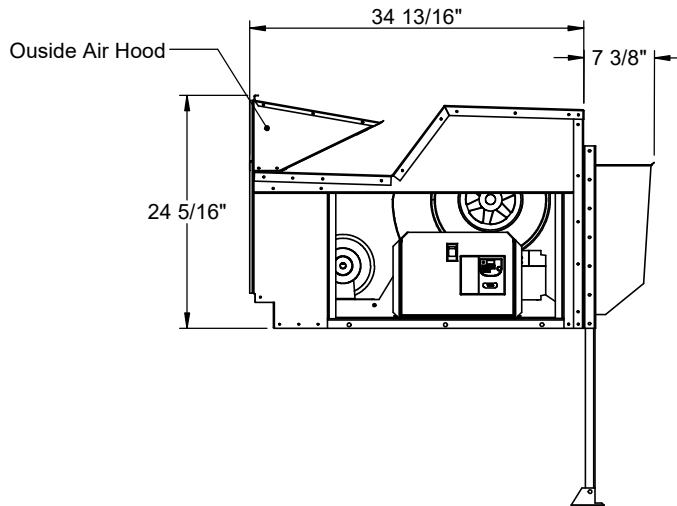

**Note:**  
Please contact ProVent if RTU has a hinged filter access option.



3847 WABASH DR.  
MIRA LOMA, CA 91725

PHONE (951) 685-1101  
FAX (619) 872-9799

SUBMITTED TO: \_\_\_\_\_  
COMPANY: \_\_\_\_\_  
JOB NAME: \_\_\_\_\_  
EQUIPMENT: \_\_\_\_\_  
NOTES: \_\_\_\_\_

FORM NO:  
PE-93

DATE:  
5/2/2024

PART NUMBER:  
PEDCPRL SERIES

REV:  
M2

DRAWN BY:  
CNG