
FEATURES

- Roof curb perimeter made of galvanized steel.
- Gasketing package provided.
- Heat treated wood nailer provided.
- Corner flanges are pre-threaded for easy bolt on assembly.
- Pitched, adjustable pitch/adjustable height, welded, different height, isolation and calculated curbs are available.

NOTES


Attach ductwork to roof curb. Flanges of duct rest on top of the curb. Support ductwork below the curb.

WHOOK DOWN DOOF OURDS FOR YORK UNITS	PROVENT P/N	Α	EST. WEIGHT	SEISMIC CLIP KIT P/N
KNOCK-DOWN ROOF CURBS FOR YORK UNITS	CBKDLXL08	8"	53 Lbs.	
PG3E, PC3E, PCG4B, PCE4B 48-60	CBKDLXL11	11"	64 Lbs.	KDKITLX
PCG6B, PCE6B, PHE4/6B, PHG4/6B 36-60	CBKDLXL14	14"	75 Lbs.	
	CBKDLXL18	18"	95 Lbs.	
	CBKDLXL24	24"	114 Lbs.	

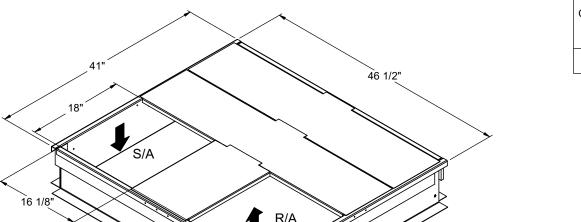

When conforming to CBC 2022 and IBC 2021, include optional seismic hold down clip kit.

Available on 8" - 14"

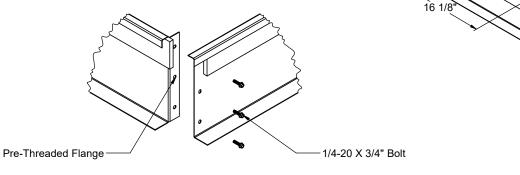

CORNER DETAIL

CROSS SECTION DETAIL



3847 WABASH DR. MIRA LOMA, CA 91725

PHONE (951) 685-1101 FAX (619) 872-9799

SUBMITED TO:	
COMPANY:	
IOR NAME:	
EQUIPMENT: _	
NOTES:	

FORM NO: PART NUMBER:
CBKD-151 CBKDLXL SERIES

"À"

DATE: 1/13/2025

Wood Nailer

REV: DRAWN BY:

25 **6** CNG