

FEATURES

- Roof curb perimeter made of galvanized steel.
- Gasketing package provided.
- Heat treated wood nailer provided.
- Corner flanges are pre-threaded for easy bolt on assembly.
- Pitched, adjustable pitch/ adjustable height, welded, different height, isolation and calculated curbs are available.

NOTES

Attach ductwork to roof curb. Flanges of duct rest on top of curb. Support ductwork below the curb.



KNOCK-DOWN ROOF CURBS FOR YORK CHOICE UNITS

AV, KV28; AW, KW18-23; AH, AL, KH, KL25; HV, WV25

PROVENT P/N	A	EST. WEIGHT	SEISMIC CLIP KIT P/N
CBKDSAV2808**	08"	240 Lbs.	KDKITSAV28
CBKDSAV2811**	11"	275 Lbs.	
CBKDSAV2814**	14"	311 Lbs.	
CBKDSAV2818**	18"	454 Lbs.	
CBKDSAV2824**	24"	560 Lbs.	


When conforming to CBC 2022 and IBC 2021, include optional seismic hold down clip kit.

Available for 8" - 18"

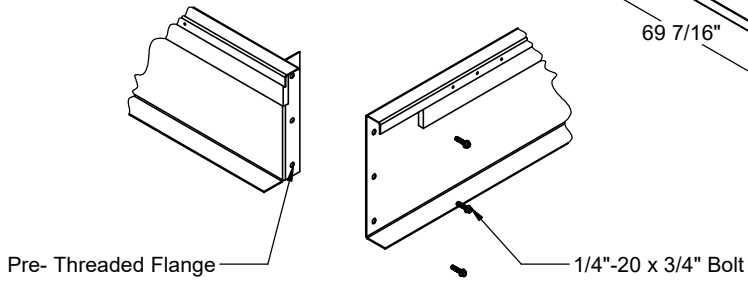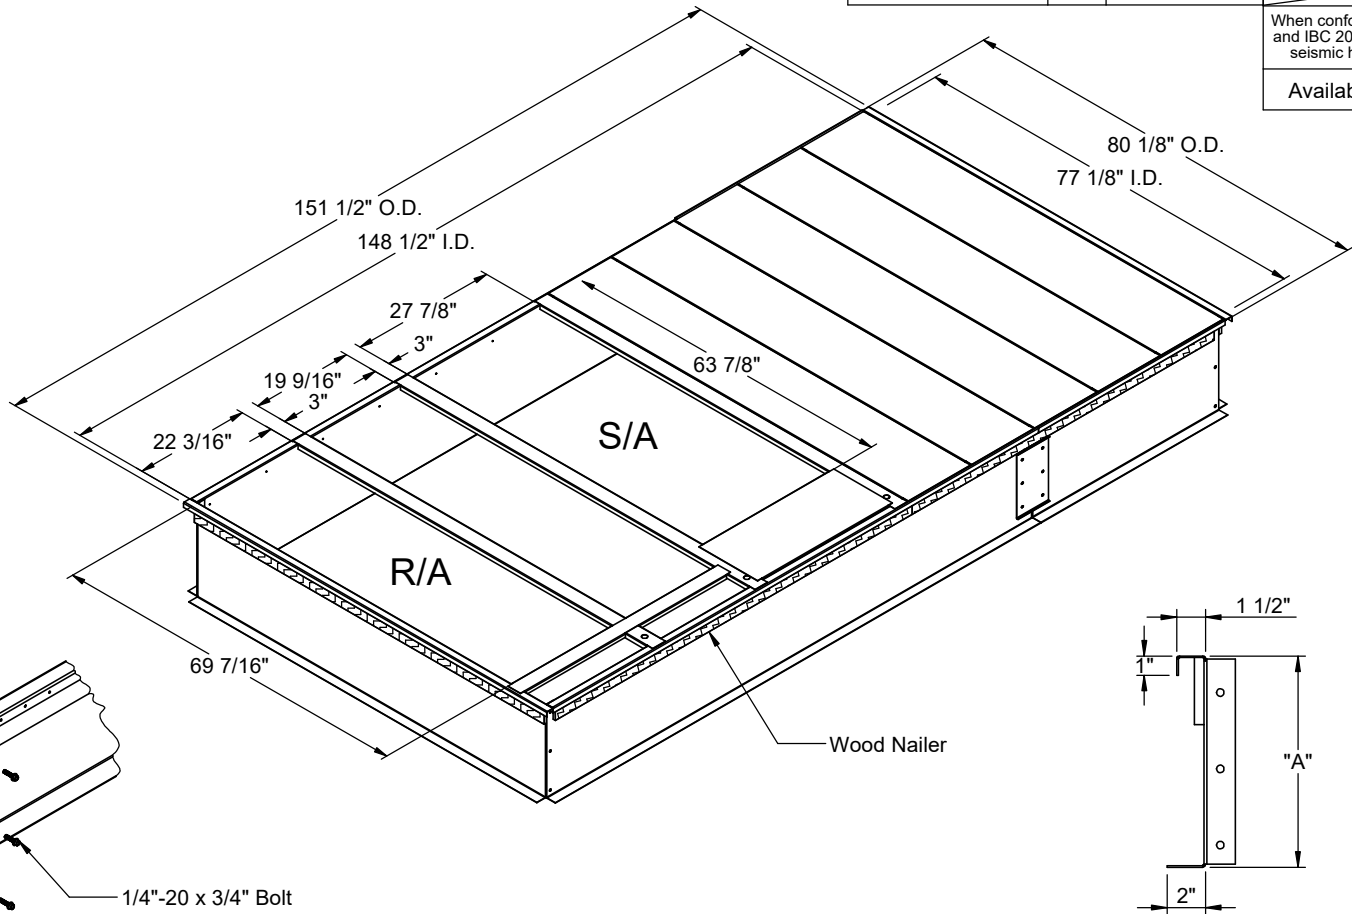

CORNER DETAIL

CBKDSAV2818 is 12GA perimeter



CROSS SECTION DETAIL



3847 WABASH DRIVE
MIRA LOMA, CA 91752

PHONE (951) 685-1101
FAX (619) 872-9799

SUBMITTED TO: _____
COMPANY: _____
JOB NAME: _____
EQUIPMENT: _____
NOTES: _____

FORM NO:
-

DATE:
1/27/2025

PART NUMBER:
CBKDSAV28 SERIES

REV:
7

DRAWN BY:
CNG